



# IMO 4, L4BH: 35 cbm Lightweight SWAP BODY Tank Containers

For Transport and Storage of Liquid Products



- / Flexibility in mode of transport
- / Low tare weight
- / Safe handling




[www.raffleslease.com](http://www.raffleslease.com)

Part of  
**STREAM**

Contact our experts:

[marketing@raffleslease.com](mailto:marketing@raffleslease.com)

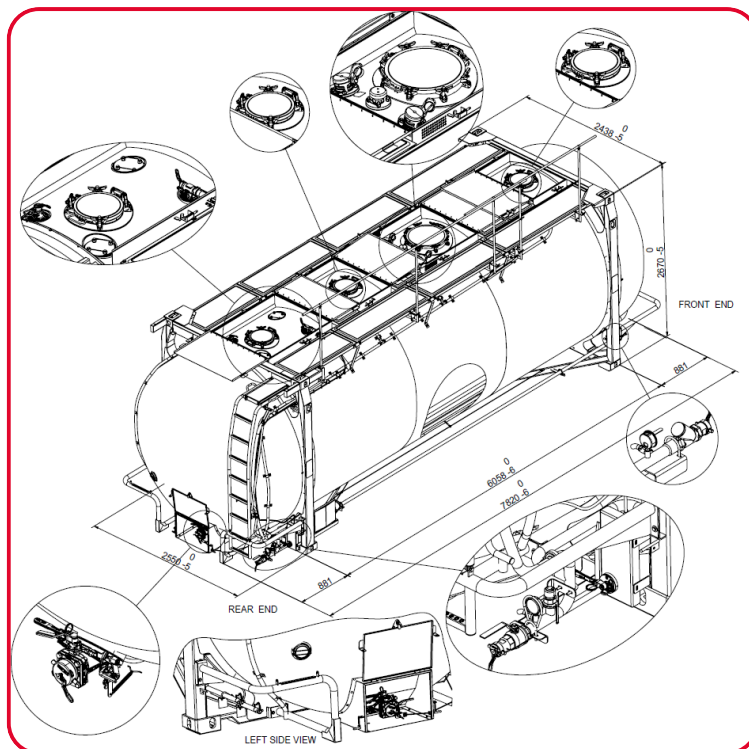

## IMO 4, L4BH: 35 cbm Lightweight SWAP BODY Tank Containers

|                             |                                                                                                                          |                                  |                                                                                                                                               |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Capacity</b>             | 35000 litres / 9246 U.S. gallons                                                                                         | <b>Airline/Vapor Return</b>      | 1 x 40 mm / 1.5 inch stainless steel ball valve with pressure gauge. Remote control and connection at ground level at rear and front of tank. |
| <b>Approvals</b>            | <b>IMO4, L4BH</b>                                                                                                        | <b>Product control</b>           | Thermometer fitted, prepared for telematic systems                                                                                            |
| <b>L x W x H</b>            | 25 feet / 7820 mm<br>8.3 feet / 2550 mm<br>8.8 feet / 2670 mm                                                            | <b>Top openings</b>              | 1 x manway 500 mm / 20 inch diameter, swing bolt closures (8x) and 3 x cleaning hatches 300 mm, swing bolt closures (4x)                      |
| <b>Maximum Gross Weight</b> | 39000 kg                                                                                                                 | <b>Accessibility from above</b>  | Full coverage, wide non-slip marine resistant grade aluminium, 1x collapsible handrail ground operated                                        |
| <b>Tare Weight</b>          | <b>3880 kg</b>                                                                                                           | <b>Bottom discharge</b>          | 1 x DN80 / 3 inch, 45° footvalve, stainless steel, 3 closures, 3 inch BSP connection and emergency closure                                    |
| <b>Test Pressure</b>        | 4 bar/ 58 psi                                                                                                            | <b>Insulation &amp; Cladding</b> | 50 mm PU thickness with aluminum foil, Lamilux xtreme cladding                                                                                |
| <b>Baffles</b>              | 4 x 316L Stainless steel, 3mm thick<br>70% fully welded on double plates vertical<br>V-shaped corrugated baffles fitted. | <b>Heating/Cooling</b>           | Steam heated weld-in bottom valve flange, Coils with 12 longitudinal runs, 15.12 m2 effective heating surface and 3 bar working pressure.     |

### Approvals:

Approvals for international transport as UN Portable tank including (IMO 4 IMDG, RID/ADR-L4BH), CSC UIC, TIR and other local approvals.

\*All specification details are based on the average IMO 4 L4BH, 35000 litre capacity swap body tank containers in the Raffles Lease fleet. Specifications may vary based on a selected tank container. For more specific details please contact your local Raffles Lease office.  
Our full office list can be found on our website at [www.raffleslease.com](http://www.raffleslease.com)

### Specification Options:

- Collapsible handrails
- Ground operated air-line
- Spill box covers on demand
- Siphon tube (top discharge)
- Various valve options
- GPS tracking and telemetry systems
- Gaskets for different purposes available
- Customer Corporate Design is possible :  
tailormade layout can be installed for marketing purpose



**Raffles Lease Ltd.**  
Grosse Elbstrasse 277 A  
22767 Hamburg, GERMANY  
Phone: +49 40 300684796



[www.raffleslease.com](http://www.raffleslease.com)

Part of  
**STRΞM**

**Contact our experts:**  
[marketing@raffleslease.com](mailto:marketing@raffleslease.com)